


## ■ 제품 디자인



### ■ 제품 전개도

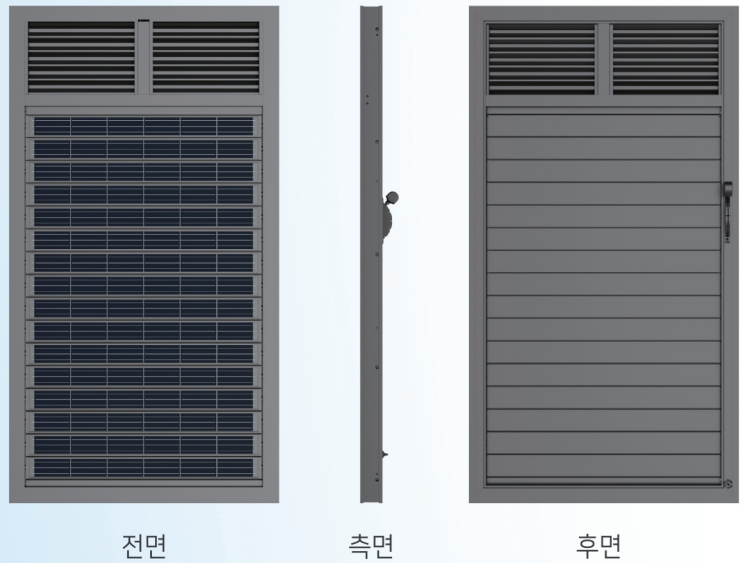

전면

측면

후면


### ■ 제품 작동전개



## ■ 제품 사양

항목		사양	
		16 직렬	8직렬 · 2병렬
최대출력	Pmax (Wp)	256 W	256 W
최대출력동작전압	Vmp (V)	88.0	44.0
최대출력동작전류	Imp (A)	2.9	5.8
개방전압	Voc (V)	107.2	53.6
단락전류	Isc (A)	3.1	6.2
셀유형 / 셀수량	Isc (A)	PERC / 10EA	
모듈 효율 (Operating area)	EA	15.97%	
제품 크기		1,170 x 2,310 x 121 (mm)	
제품 무게		45kg	
작동 온도		-40°C ~ 85°C (-40°F ~ 185°F)	

## ■ 세대별 설치안

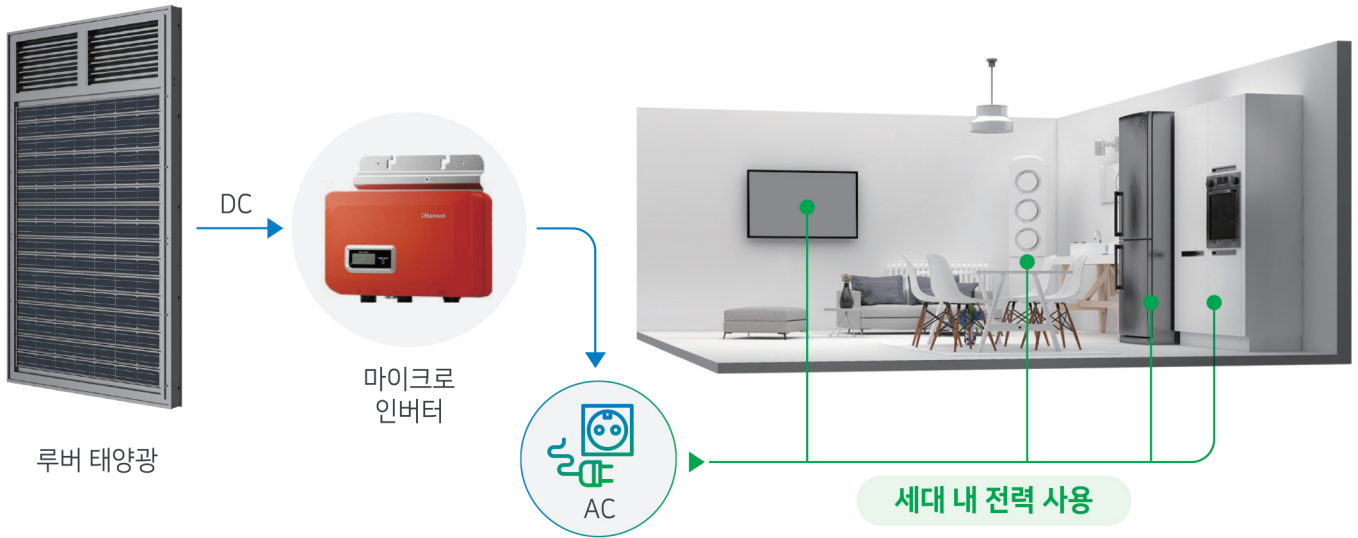

## ■ 공용부 설치안

